

B4



1  
 2  
 3  
 4  
 5  
 6  
 7  
 8  
 9  
 10  
 11  
 12  
 13  
 14  
 15  
 16  
 17  
 18  
 19  
 20  
 21  
 22  
 23  
 24  
 25  
 26  
 27  
 28  
 29  
 30  
 31  
 32  
 33  
 34  
 35  
 36  
 37  
 38  
 39  
 40  
 41  
 42  
 43  
 44  
 45  
 46  
 47  
 48  
 49  
 50  
 51  
 52  
 53  
 54  
 55  
 56  
 57  
 58  
 59  
 60  
 61  
 62  
 63  
 64  
 65  
 66  
 67  
 68  
 69  
 70  
 71  
 72  
 73  
 74  
 75  
 76  
 77  
 78  
 79  
 80  
 81  
 82  
 83  
 84  
 85  
 86  
 87  
 88  
 89  
 90  
 91  
 92  
 93  
 94  
 95  
 96  
 97  
 98  
 99  
 100  
 101  
 102  
 103  
 104  
 105  
 106  
 107  
 108  
 109  
 110  
 111  
 112  
 113  
 114  
 115  
 116  
 117  
 118  
 119  
 120  
 121  
 122  
 123  
 124  
 125  
 126  
 127  
 128  
 129  
 130  
 131  
 132  
 133  
 134  
 135  
 136  
 137  
 138  
 139  
 140  
 141  
 142  
 143  
 144  
 145  
 146  
 147  
 148  
 149  
 150  
 151  
 152  
 153  
 154  
 155  
 156  
 157  
 158  
 159  
 160  
 161  
 162  
 163  
 164  
 165  
 166  
 167  
 168  
 169  
 170  
 171  
 172  
 173  
 174  
 175  
 176  
 177  
 178  
 179  
 180  
 181  
 182  
 183  
 184  
 185  
 186  
 187  
 188  
 189  
 190  
 191  
 192  
 193  
 194  
 195  
 196  
 197  
 198  
 199  
 200  
 201  
 202  
 203  
 204  
 205  
 206  
 207  
 208  
 209  
 210  
 211  
 212  
 213  
 214  
 215  
 216  
 217  
 218  
 219  
 220  
 221  
 222  
 223  
 224  
 225  
 226  
 227  
 228  
 229  
 230  
 231  
 232  
 233  
 234  
 235  
 236  
 237  
 238  
 239  
 240  
 241  
 242  
 243  
 244  
 245  
 246  
 247  
 248  
 249  
 250  
 251  
 252  
 253  
 254  
 255  
 256  
 257  
 258  
 259  
 260  
 261  
 262  
 263  
 264  
 265  
 266  
 267  
 268  
 269  
 270  
 271  
 272  
 273  
 274  
 275  
 276  
 277  
 278  
 279  
 280  
 281  
 282  
 283  
 284  
 285  
 286  
 287  
 288  
 289  
 290  
 291  
 292  
 293  
 294  
 295  
 296  
 297  
 298  
 299  
 300  
 301  
 302  
 303  
 304  
 305  
 306  
 307  
 308  
 309  
 310  
 311  
 312  
 313  
 314  
 315  
 316  
 317  
 318  
 319  
 320  
 321  
 322  
 323  
 324  
 325  
 326  
 327  
 328  
 329  
 330  
 331  
 332  
 333  
 334  
 335  
 336  
 337  
 338  
 339  
 340  
 341  
 342  
 343  
 344  
 345  
 346  
 347  
 348  
 349  
 350  
 351  
 352  
 353  
 354  
 355  
 356  
 357  
 358  
 359  
 360  
 361  
 362  
 363  
 364  
 365  
 366  
 367  
 368  
 369  
 370  
 371  
 372  
 373  
 374  
 375  
 376  
 377  
 378  
 379  
 380  
 381  
 382  
 383  
 384  
 385  
 386  
 387  
 388  
 389  
 390  
 391  
 392  
 393  
 394  
 395  
 396  
 397  
 398  
 399  
 400  
 401  
 402  
 403  
 404  
 405  
 406  
 407  
 408  
 409  
 410  
 411  
 412  
 413  
 414  
 415  
 416  
 417  
 418  
 419  
 420  
 421  
 422  
 423  
 424  
 425  
 426  
 427  
 428  
 429  
 430  
 431  
 432  
 433  
 434  
 435  
 436  
 437  
 438  
 439  
 440  
 441  
 442  
 443  
 444  
 445  
 446  
 447  
 448  
 449  
 450  
 451  
 452  
 453  
 454  
 455  
 456  
 457  
 458  
 459  
 460  
 461  
 462  
 463  
 464  
 465  
 466  
 467  
 468  
 469  
 470  
 471  
 472  
 473  
 474  
 475  
 476  
 477  
 478  
 479  
 480  
 481  
 482  
 483  
 484  
 485  
 486  
 487  
 488  
 489  
 490  
 491  
 492  
 493  
 494  
 495  
 496  
 497  
 498  
 499  
 500  
 501  
 502  
 503  
 504  
 505  
 506  
 507  
 508  
 509  
 510  
 511  
 512  
 513  
 514  
 515  
 516  
 517  
 518  
 519  
 520  
 521  
 522  
 523  
 524  
 525

12

⑤ Int. Cl.<sup>5</sup>: F01K 23/06, F02C 3/28


(72) Inventor: **Hisatome, Masatoshi, c/o Mitsubishi Jukogyo K.K.**  
**No. 5-1, Marunouchi 2-chome, Chiyoda-ku Tokyo(JP)**

74 Representative: Meissner, Peter E., Dipl.-Ing.  
et al  
Patentanwaltsbüro Meissner & Meissner,  
Herbertstrasse 22  
W-1000 Berlin 33(DE)

⑤④ Power generation system.

(57) Under the purport of obviating the problems in the heat cycle, complicate system layout and separation of CO<sub>2</sub> in composite power generation system of prior art, the invention proposes a novel composite power generation system, which comprises a primary combustor for effecting a high temperature combustion of coal fuel under a reducing condition by compressed air or oxygen supplied from a compressor; a secondary combustor for effecting complete combustion of the resulting product gas of said primary combustor, said secondary combustor being supplied with said primary combustor product gas, air or oxygen for realizing said complete burning of the primary combustor product gas and an additive gas for controlling the combustion gas temperature in said secondary combustor consisting either of steam or of carbon dioxide; a gas turbine driven by a working fluid consisting of the resulting combustion gas of said secondary combustor and; disposed in series downstream of said gas turbine in the order, a waste heat steam generator, a desulfurizer and a condenser for the exhaust gas of the gas turbine.

FIG. 1

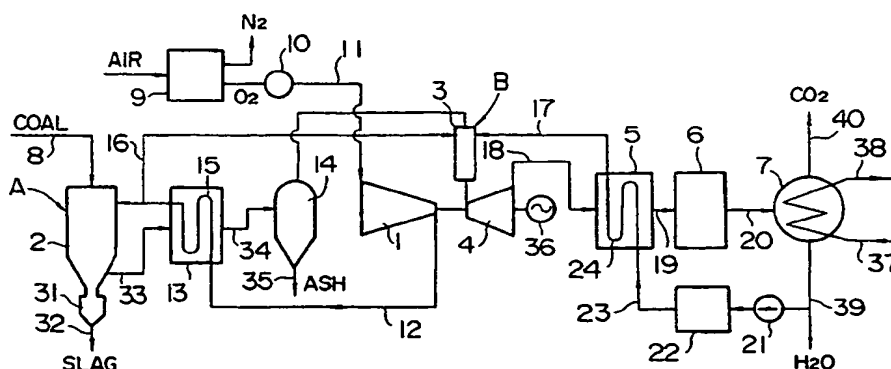


**EP 0 453 059 A1**

## FIELD OF THE INVENTION AND RELATED ART STATEMENT

The present invention relates to a power generation system.

For better understanding of the stand of the technique, an explanation is first made for a typical coal  
5 gasification composite power generation system of the prior art with reference to Fig. 7 appended.

The gasifier unit is composed essentially of a primary combustor 01 and a succeeding disposed  
reductor 07. The primary combustor 01 is supplied with coal and char as the fuel. By "char", it is meant a  
pulverous carbon deposited in the gasifier unit without being availed for the gasification. The primary  
combustor 01 is operated under a high temperature combustion of such supplied fuel under a reducing  
10 condition (an air ratio of less than 1) with compressed air. Coal is supplied to the primary combustor 01  
from a coal supply duct 02. Char is recovered after the gasifier unit by a char collector 03 and returned to  
the primary combustor 02 via a char supply duct 04 as fuel supplement. A turbo compressor 05 is  
employed for supplying the compressed air to the combustor via an air duct 06. The combustion gas enters  
the reductor 07, where the intrinsic gasification of the coal fuel additionally supplied thereto from the supply  
15 duct 02 is realized according to the following reaction scheme:



20 The resulting product gas is cooled through a heat economizer 08 and is then passed to the char  
collector 03 via a gas duct 09 to recover the deposited char. The collected char is returned to the primary  
combustor 01 via the char supply duct 04 as explained previously.

The product gas leaving the char collector 03 enters then a dry desulfurizer 011 via a gas duct 010,  
where it is desulfurized. The desulfurized gas passes then through a dust remover 013 via a gas duct 012  
25 to remove the entrained dust particles, before it is fed to a secondary combustor 015 constituting the burner  
for a gas turbine via a gas duct 014, where it is burnt completely by compressed air supplied from the turbo  
compressor 05. The resulting combustion gas drives the gas turbine 016 for generating an electric power  
by a generator 029 driven by the gas turbine. The gas turbine inlet temperature is controlled by adjusting  
the feed rate of the combustion air or, if the air feed rate is settled at a constant value, by adjusting the feed  
30 rate of coal to the gasifier unit.

The turbine exhaust gas is sent to a waste heat steam generator 018, where the sensible heat of the  
turbine exhaust gas is recovered by utilizing it for steam generation before it is discharged out to the  
atmosphere via a chimney 019.

The steam produced in the steam generator 018 is supplied via a steam main 020 to a steam turbine  
35 021 for an additional power generation. The spent steam is condensed in a condenser 022 and the  
condensate is returned to the steam generator 018 and to the heat economizer 08 via each water feed line  
024, 025 by a feed pump 023 under pressure elevation. The steam generated in the heat economizer 08 is  
also supplied to the steam main 020 via a steam line 026 and is availed for the power generation in the  
steam turbine 021. On combustion of the coal fuel in the gasification unit, molten slag of ash in a form of  
40 particles is formed, which fall down into a slag tank 026 and are discharged out to the outside of the system  
through a discharge duct 027. The dust collected in the dust remover 013 is taken out of the system via a  
discharge duct 028.

By the gas turbine 016, the generator 029 is driven to generate an electric power.

Coal gasification composite power generation systems of prior art as explained above have exhibited  
45 many problems left unsolved, such as follows:

#### A) Problems in the Heat Cycle

The coal gasification is realized, as explained above, in the gasification unit composed of a primary  
50 combustor for producing a high temperature gas and of a reductor for gasifying the coal supplied thereto, in  
which the gasification is effected at a reaction temperature maintained at about 1,000 °C. Here, some time  
intervals are required for achieving sufficient mixing of the coal powder with the reaction gas and also for  
the gasification reaction to take place up to a sufficient degree, so that the gasification unit have to be  
designed in large scale. In addition, the wall of the gasification unit should be constructed as a water-wall  
55 similar to that of boiler furnace to reach sufficient cooling for protecting against the high temperature inside  
the unit.

For practical operation of dust removal and of desulfurization, the primary combustor product gas has to  
be cooled conce to a low temperature, for example, to ordinary temperature, so that a waste heat recovery

means, such as, the heat economizer 08 or the like, should be installed at the outlet of the gasification unit, in order to recover the sensible heat of the product gas deprived upon the cooling thereof by generating a steam for driving a steam turbine power generator.

Thus, the coal gasification product gas which has been subjected to heat recovery by Rankine cycle is employed for the fuel of the gas turbine. In the above typical prior art system, the coal gasification product gas which has passed the heat economizer 08 is supplied to the burner 015 of the gas turbine 016. The exhaust gas of the gas turbine 016 is then once more subjected to a heat recovery by waste heat steam generator 018 for driving the steam turbine 021. Thus, the prior art system operates, from the stand of view of its heat cycle, in a sequence of a steam cycle/gas turbine cycle/steam cycle, namely a Rankine cycle (in the gasification unit)/a Brayton cycle (in the gas turbine)/a Rankine cycle (in the waste heat steam generator), that is to say, a system in which a steam turbine cycle is installed upstream the gas turbine cycle.

Therefore, the prior art system has to suffer from a lower over-all heat efficiency on the theoretical basis, as compared to a supposed system of simple combination of a gas turbine cycle with a steam turbine cycle, since an additional steam cycle (with a relatively low theoretical heat efficiency) is added preceding the supposed simple composite cycle of direct serial combination of a gas turbine cycle (with a relatively high theoretical heat efficiency) with a steam cycle. Explaining this with an exemplary calculation, the circumstance may be given as follows:

Supposing that the proportion of heat recovered in the gasification unit relative to the total enthalpy of the product gas to be, for example, 40 % and the gas having an enthalpy of remaining 60 % is supplied to the gas turbine operated with an over-all heat engine efficiency of, for example, 32 % and the over-all heat efficiency in the steam cycle of the gasification unit is, say, 40 % and that of the waste heat steam generator is, say, 20 %, the over-all heat efficiency  $\eta_1$  of the coal gasification composite power generation system of prior art is calculated by:

$$\begin{aligned}\eta_1 &= 0.4 \times 0.40 + 0.6 \times 0.32 + (0.6 - 0.19) \times 0.20 \\ &= 0.434 \\ &= 43.4 \%\end{aligned}$$

In contrast thereto, the over-all heat efficiency  $\eta_2$  for the supposed simple composite cycle is calculated as:

$$\begin{aligned}\eta_2 &= 1.0 \times 0.32 + (1.0 - 0.32) \times 0.2 = 0.456 \\ &= 45.6 \%\end{aligned}$$

Comparing the two calculations, it is seen that the over-all heat efficiency of the supposed simple composite cycle is higher than that of the coal gasification composite power generation system by a relative proportion of about 5 %.

Thus, it is recognized that an incorporation of a steam cycle preceding the combination of a gas turbine cycle with a steam turbine cycle causes a theoretical decrement of the over-all heat efficiency of the system.


#### B) Problem in the Complexity of the System

The gasification unit operates at a high temperature of about 1,000 °C. This high temperature brings about an inevitable large-sized design of the unit, in order to attain substantial completion of the conversion and, in addition, accompaniment of deposition of carbon, i.e. char, as described above. The deposited char should be returned to the gasification unit, necessitating thus means (such as 03 and 04) for collecting and returning the char. A heat recovering means, such as, the heat economizer 08, is also necessary for cooling the product gas from the gasification unit once to a low temperature, such as, to ordinary temperature. The necessity of such accessory installations brings about complexity of the system, in addition to the problem of the unavoidable large scale layout of the gasification unit, resulting thus in a large investment cost.

C) Problems incidental to CO<sub>2</sub> Removal

As to the removal of CO<sub>2</sub> from the waste gas for environmental protection, it is important, taking into account of the provisional or legal settlement of a limitation of the total amount of CO<sub>2</sub> permitted to be wasted into the atmosphere prospective in near future, to realize such removal or separation of CO<sub>2</sub> at the lowermost investment cost with minimum power consumption. In this respect, the previous coal gasification composite power generation systems have revealed problems such as follows:

- (1) An additional installation of an apparatus for removing or recovering CO<sub>2</sub>, such as, an adsorption column based on PSA or TSA, a low temperature cryoseparator and so on, is necessary.
- (2) An installation of a CO-shift converter for complete conversion of CO in the product gas from the coal gasification unit into CO<sub>2</sub>. The CO-shift converter for realizing the reaction



employs a conversion catalyst, which is subject to a deterioration of the catalytic activity after a certain operation period, requiring thus a frequent renewal of the spent catalyst.

- (3) A large power consumption is required for the CO<sub>2</sub> separation in the prior system due to additional installation of a separate apparatus, such as, PSA, TSA or cryoseparator, therefor. These separation apparatuses require each a comparable energy consumption for separating CO<sub>2</sub>. Thus, an energy consumption of about 0.4 kWh (about 430 kcal) is necessary to separate 1 NTP m<sup>3</sup> of CO<sub>2</sub>. This value corresponds to about 10 % of the power generated by the system, which corresponds to about 20 % of the heat energy, bringing about a considerable energy cost for the CO<sub>2</sub> separation.

The world-wide stand of the technique today for the coal gasification composite power generation system proposed by various plant makers of the world is as explained above and, thus, there are many problems left still unsolved.

## OBJECT AND SUMMARY OF THE INVENTION

The object of the present invention is to provide a power generation system which is constructed so as to obviate the problems concerning the heat cycle, the complicate arrangement of the system and the technique for CO<sub>2</sub>-separation in the stand of technique explained above.

The above object is solved by providing a power generation system according to the present invention, which comprises a primary combustor for effecting a high temperature combustion of coal fuel under a reducing condition by compressed air or oxygen supplied from a compressor; a secondary combustor for effecting complete combustion of the resulting product gas of the primary combustor, said secondary combustor being supplied with said primary combustor product gas, air or oxygen for realizing said complete combustion of the primary combustor product gas and an additive gas for effecting control of the combustion gas temperature in said secondary combustor consisting either of steam or of carbon dioxide; a gas turbine driven by a working fluid consisting of said secondary combustor combustion gas and; disposed in series downstream of said gas turbine in the order, a waste heat steam generator, a desulfurizer and a condenser for the exhaust gas of said gas turbine.

The primary combustor of the system according to the present invention serves for combustion of coal fuel under a reducing condition by the lowest necessary amount of compressed air or oxygen for effecting the combustion of the coal fuel at a temperature high enough to cause melting of ash from the combustion. This will bring about a high calorific value of the resulting product gas, a scarce rate of unburnt loss (below 1 %) of the fuel, a high separation rate (over 80 - 90 % or more) of the molten ash and an easy cleanup treatment of the product gas.

An employment of the lowest requisite amount of the oxygen-containing gas for the incomplete combustion in the primary combustor permits to form a product gas of the primary combustor having high calorific value to be supplied to the secondary combustor. Moreover, an installation of a steam cycle upstream the gas turbine is dispensed with. Therefore, it is able to obtain maximum amount of the combustion gas in the secondary combustor maintained at a scheduled gas temperature at the inlet of the gas turbine (the highest permissible temperature for the gas turbine), by controlling the amount of the oxygen-containing gas supplied to the secondary combustor. This is to say, that the maximum amount of combustion gas having the highest permissible temperature and having a calorific value corresponding to 100 % of the total enthalpy of the product gas supplied can be fed to the gas turbine, so long as the indispensable energy loss, such as, the heat dissipated into the environment etc., is neglected. Thus, it is possible to construct a coal gasification composite gas turbine power generation system of maximum

efficiency.

Moreover, an installation of the char recovery and recirculation means required in the prior art system can be dispensed with, since the composite power generation system according to the present invention does not form any char.

5 It is possible to design the heat exchanger for cooling the primary combustor product gas in smaller dimension, since it is enough to cool the product gas of the primary combustor only to a temperature lower than the melting point of the ash formed therein.

In the case of oxygen-burning (use of oxygen as the burning gas in the primary and secondary combustors of the system), the exhaust gas from the gas turbine is composed of only  $\text{CO}_2$  and  $\text{H}_2\text{O}$  (exactly speaking, scarce amounts of Ar and  $\text{N}_2$  are included), so that  $\text{CO}_2$  (having a small moisture content) 10 can be separated from the steam content by simply cooling the exhaust gas of the gas turbine in a turbine exhaust gas condenser to cause condensation of steam into liquid phase water separated from the gas phase of  $\text{CO}_2$ . Thus, an employment of installation of special means for separating  $\text{CO}_2$  is unnecessary, with simultaneous omission of power consumption therefor.

15 In the air-burning (use of air as the burning gas in the primary and secondary combustors), the gas turbine exhaust gas is composed mainly of  $\text{N}_2$ ,  $\text{CO}_2$  and steam (in the case of employment of water recirculation in the system explained below) or of  $\text{N}_2$  and  $\text{CO}_2$  (in the case of  $\text{CO}_2$  recirculation in the system explained also below). Thus, the dry gas which has passed the exhaust gas condenser contains  $\text{N}_2$  beside the content of  $\text{CO}_2$ . However, the amount of dry gas is small due to the separation of steam content, 20 it is practically easy to realize separation of  $\text{CO}_2$  from  $\text{N}_2$ .

As described above, the system according to the present invention provides various advantageous effects as follows:

1) Each element for the gasification unit inclusive of the primary combustor can be designed in smaller size and the heat for cooling the primary combustor product gas is small, since the coal fuel for 25 operating the system is supplied altogether to the primary combustor and the coal fuel is subjected to an incomplete burning at high temperature using the minimum requisite amount of compressed air or oxygen. The most part of ash formed in the gas produced in the primary combustor is removed within the gasification unit and the remainder part is removed in a subsequently disposed dust remover to a level permissible for the gas turbine. It is thus enough to cool the product gas of the primary combustor 30 only to a level below the melting point of the ash (usually above  $800^\circ\text{C}$ ) for carrying out the dry dust removal, allowing thus to design the heat exchanger for the product gas of the primary combustor in a small size with smaller heat required for cooling thereof. Therefore, the primary combustor and the heat exchanger for the product gas thereof may be designed in an air-cooled or oxygen-cooled construction, instead of a water-cooled construction. The resulting heated air or oxygen is utilized for burning the coal 35 fuel and for burning the product gas in the primary and secondary combustors.

In this manner, an improvement in the heat efficiency can be attained, since a steam cycle having a relatively low theoretical heat efficiency installed in a conventional coal gasification composite power generation system upstream the gas turbine can be avoided.

2) When the cooling of the primary combustor product gas is effected by heat exchange of the product 40 gas with the oxygen-containing gas to be supplied to the primary combustor or using the steam generated in the waste heat steam generator, an employment of a steam cycle, which has lower theoretical heat efficiency, upstream the gas turbine can be omitted and, thus, an improvement in the heat efficiency is realized.

3) Due to the omission of the separate gasification part (reductor) in the gasification unit of the 45 conventional system permitted by the employment of an integral gasification unit with total supply of the coal fuel altogether to the primary combustor and due to elimination of any char formation, a simplification of the gasification unit due to omission of reductor with its accessory members and of installations for the collection and recirculation of char can be attained.

4) In the case of oxygen-burning, the combustion gas in the secondary combustor consists substantially 50 of  $\text{CO}_2$  and  $\text{H}_2\text{O}$ , so that  $\text{CO}_2$  can be separated from the combustion gas by simply cooling and condensing the steam component as condensate in a condenser for the turbine exhaust gas, with elimination of requirement of power consumption for the  $\text{CO}_2$  separation.

5) In the case of air-burning, the combustion gas in the secondary combustor consists essentially of  $\text{N}_2$ ,  $\text{CO}_2$  and  $\text{H}_2\text{O}$  with some minute gas components. Here, it is not able to attain separation of  $\text{CO}_2$  simply 55 by condensing the  $\text{H}_2\text{O}$  content therein. However, the total amount of the combustion gas in the secondary combustor is relatively small (the air ratio requisite in the composite power generation system according to the present invention amounts only to about 1.1 as contrasted to that of about 3 in the conventional composite power generation system, producing thus only about 1/3 of the combustion gas

as compared with the conventional composite power generation system) and the temperature thereof is maintained relatively low, so that the separation of CO<sub>2</sub> is much easier than the conventional composite power generation system.

## 5 BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic flow diagram showing an embodiment of the coal gasification composite power generation system employing oxygen-burning with water recirculation according to the present invention.

Fig. 2 is a schematic flow diagram showing an embodiment of the coal gasification composite power generation system employing oxygen-burning with CO<sub>2</sub> recirculation according to the present invention.

Fig. 3 is a schematic flow diagram showing an embodiment of the coal gasification composite power generation system employing air-burning with water recirculation according to the present invention.

Fig. 4 is a schematic flow diagram showing an embodiment of the coal gasification composite power generation system employing air-burning with CO<sub>2</sub> recirculation according to the present invention.

Fig. 5 is a schematic flow diagram showing another embodiment of the coal gasification composite power generation system employing oxygen-burning with water recirculation according to the present invention.

Fig. 6 is a schematic flow diagram showing a further embodiment of the coal gasification composite power generation system employing oxygen-burning with water recirculation according to the present invention.

Fig. 7 shows a typical embodiment of the coal gasification composite power generation system of prior art in a schematic flow diagram.

## DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Below, the present invention will be described in more detail with respect to six embodiments thereof with reference to each corresponding drawing.

The first embodiment of the present invention as illustrated in Fig. 1 employs oxygen-burning with recirculation of condensate as process water.

This composite power generation system comprises a gasification unit A including a primary combustor 2 in which a coal fuel supplied is subjected to a high temperature combustion under a reducing condition by supplying compressed oxygen from a turbo compressor 1; a combustion unit B including a secondary combustor 3 in which the product gas from the gasification unit A is subjected to complete combustion with oxygen under injection therein steam for effecting control of the combustion gas temperature; a gas turbine 4 driven by the combustion gas from the combustion unit B as the working fluid and; disposed in series downstream said gas turbine in the order, a waste heat steam generator 5, a desulfurizer 6 and a condenser 7 for the turbine exhaust gas.

A pulverous coal fuel is supplied to the primary combustor 2 of the gasification unit A via a coal supply duct 8. On the other hand, oxygen (O<sub>2</sub>) isolated from air under separation of nitrogen in a cryoseparator 9 is supplied to the primary combustor 2, under compression up to the scheduled pressure by a turbo compressor 1 (which is driven in this embodiment by the gas turbine 4) via an oxygen gas holder 10, a suction duct 11 and heat exchanger 13 for cooling the product gas of the gasification unit to a temperature permissible for the operation of a dust remover 14 operative to remove remaining dust particles entrained in the product gas.

The product gas from the primary combustor thus adjusted to a requisite temperature and separated from dust particles in the dust remover 14 is supplied to the secondary combustor 3 of the combustion unit B.

A part of the oxygen stream which has been heated in the heat exchanger pipe 15 is supplied to the primary combustor 2 in such an amount that the lowest minimum requisite amount of oxygen for burning the coal fuel is supplied thereto. The remainder of the oxygen stream is passed to the secondary combustor 3 of the combustion unit B via an oxygen supply duct 16. The product gas of the primary combustor 2 is subjected to complete burning in the secondary combustor 3 by the heated oxygen supplied from the oxygen supply duct 16, whereby a high temperature combustion gas is produced. The temperature of this combustion gas is adjusted by injecting an adequate amount of steam supplied from a waste heat steam generator 5 via a steam main 17 so as to maintain the gas inlet temperature of the gas turbine at a scheduled value.

The gas turbine 4 is driven by the resulting temperature-adjusted combustion gas to generate an electric power in a steady state.

The exhaust gas from the gas turbine 4 is sent to the waste heat steam generator 5 via an exhaust duct 18 to effect a heat recovery there, whereupon the exhaust gas is passed to the desulfurizer 6 via a duct 19. Then, the so desulfurized exhaust gas enters the condenser 7 for the gas turbine exhaust via a duct 20, where a predominant proportion of the steam content is separated upon condensation by cooling as condensate, a part of which is utilized under recirculation in the system.

The gas phase from the condenser 7 consists essentially of CO<sub>2</sub> having some moisture content. In this manner, separation of CO<sub>2</sub> can easily be attained without requiring any supply of external power with simultaneous recovery of water as condensate.

A part of condensate thus recovered is used for controlling the combustion gas temperature by injecting it to the combustion unit. Thus, a pertinent amount of the condensate to be used for maintaining the gas turbine inlet temperature at a scheduled value is taken out and injected into the secondary combustor 3 of the combustion unit B under pressurization by a feed pump 21 after passing through a water treatment unit 22, a water supply line 23 and heat exchange pipe 24 in the heat exchanger 5. The condensate is heated upon passing through the heat exchanger pipe 24 and is converted into steam, which is supplied via the steam main 17 to the secondary combustor 3.

Thus, there is no need for supplementing water from an external source in this embodiment.

In the embodiment shown in Fig. 1, other numerals denotes:

- 31 : A slag tank
- 32 : A slag discharge duct
- 33 : Exhaustion duct for the product gas of the primary combustor
- 34 : Dust remover inlet duct
- 35 : Dust remover discharge duct
- 36 : Generator
- 37 : Cooling water inlet conduit
- 38 : Cooling water outlet conduit
- 39 : Condensate extraction line
- 40 : CO<sub>2</sub> discharge line

The second embodiment of the composite power generation system according to the present invention is shown in Fig. 2, in which oxygen-burning and CO<sub>2</sub> recirculation are employed. The same or similar part of the system as in Fig. 1 is represented by the same denotation symbol and the explanation therefor is omitted.

In this embodiment, CO<sub>2</sub> is separated in the condenser 7 for the gas turbine exhaust and is recirculated in the system under compression by the turbo compressor 1 driven by the gas turbine. It is returned to the secondary combustor 3 so as to adjust and maintain the temperature of the exhaust gas thereof to a scheduled value.

The steam generated in the waste heat steam generator 5 is supplied to a steam turbine 41 via the steam main 17 to drive a generator 42. The exhaust from the steam turbine is condensed in a condenser 43 into condensate which is recirculated in the system by returning to the waste heat steam generator 5 by a feed pump 44 under pressurization via a supply line 45.

Oxygen to be supplied to the primary and secondary combustors 2 and 3 is separated from compressed air of a predetermined pressure supplied from an air compressor 52 driven by an electric motor 51 under the use of a cryoseparator 53.

Other numerals in Fig. 2 denote:

- 54 : Air intake duct
- 55 : Air exhaust duct
- 56 : Oxygen manifold
- 57 : Oxygen supply line

The third embodiment of the composite power generation system according to the present invention is shown in Fig. 3 in a schematic flow diagram, in which air-burning and water recirculation are incorporated. The same or similar part of the system as in Fig. 1 is represented by the same denotation symbol and the explanation therefor is omitted.

In this embodiment, oxygen employed in the first embodiment shown in Fig. 1 is replaced by air. Installation of an air cryoseparator is thus dispensed with. The gas turbine exhaust gas here consists of N<sub>2</sub>, CO<sub>2</sub> and steam, so that the gas to be recirculated for controlling the temperature of combustion gas in the combustion unit consists essentially of CO<sub>2</sub> and N<sub>2</sub> freed from the condensed steam.

The fourth embodiment of the composite power generation system according to the present invention is shown in Fig. 4 in a schematic flow diagram, in which air-burning and CO<sub>2</sub> recirculation are incorporated. The same or similar part of the system as in Fig. 1 or 2 is represented by the same denotation symbol and

the explanation therefor is omitted.

This embodiment corresponds to a system, in which oxygen employed in the second embodiment shown in Fig. 2 is replaced by air. Here, CO<sub>2</sub> is returned to the secondary combustor 3 under compression using an air compressor 52 driven by an electric motor 51.

5 The fifth embodiment of the composite power generation system according to the present invention is shown in Fig. 5 in a schematic flow diagram, in which oxygen-burning and H<sub>2</sub>O recirculation are incorporated. The same or similar part of the system as in Fig. 1 is represented by the same denotation symbol and the explanation therefor is omitted.

10 In this embodiment, the steam generated in the waste heat steam generator 5 is employed for the cooling medium of the heat exchanger 13 of the product gas of primary combustor in the first embodiment shown in Fig. 1. The oxygen from the turbo compressor 1 is supplied directly to the primary combustor 2 and to the secondary combustor 3 and the steam generated in the waste heat steam generator 5 is introduced into the secondary combustor 3 through a heat exchanger 13 for the product gas of primary combustor.

15 The sixth embodiment of the composite power generation system according to the present invention is shown in Fig. 6 in a schematic flow diagram, in which oxygen-burning and H<sub>2</sub>O recirculation are incorporated. The same or similar part of the system as in Fig. 1 is represented by the same denotation symbol and the explanation therefor is omitted.

20 In this embodiment, a part of the steam generated in the waste heat steam generator 5 is employed for controlling the temperature of the product gas of primary combustor by spraying it within the product gas heat exchanger 13. The remainder of the steam is injected into the secondary combustor 3 for controlling the inlet temperature of the gas turbine.

25 Finally, it is to be noted, that employment of air in the place of oxygen in the embodiment shown in Fig. 5 brings forth a further alternative of the composite power generation system in which air-burning and water recirculation are employed. When air is employed instead of oxygen in the embodiment shown in Fig. 6, another alternative of the composite power generation system is provided in which air-burning and water recirculation is employed, with steam spray cooling of the primary combustor product gas.

#### Claims

30

1. A power generation system comprising a primary combustor for effecting a high temperature combustion of coal fuel under a reducing condition by compressed air or oxygen supplied from a compressor; a secondary combustor for effecting complete combustion of the product gas of said primary combustor, said secondary combustor being supplied with said primary combustor product gas, air or oxygen for realizing said complete combustion of the primary combustor product gas and an additive gas for controlling the temperature of the resulting combustion gas of said secondary combustor consisting either of steam or of carbon dioxide; a gas turbine driven by a working fluid consisting of said combustion gas from the secondary combustor and; disposed in series downstream of said gas turbine in the order, a waste heat steam generator, a desulfurizer and a condenser for the exhaust gas of the gas turbine.

40

2. A power generation system according to Claim 1, wherein the steam supplied to the secondary combustor is generated in the waste heat steam generator.

45

3. A power generation system according to Claim 1, wherein the carbon dioxide supplied to the secondary combustor is that separated in the condenser for the gas turbine exhaust gas.

4. A power generation system according to Claim 1, wherein a dust removal means is disposed in the product gas supply line from the primary combustor to the secondary combustor.

50

55



161

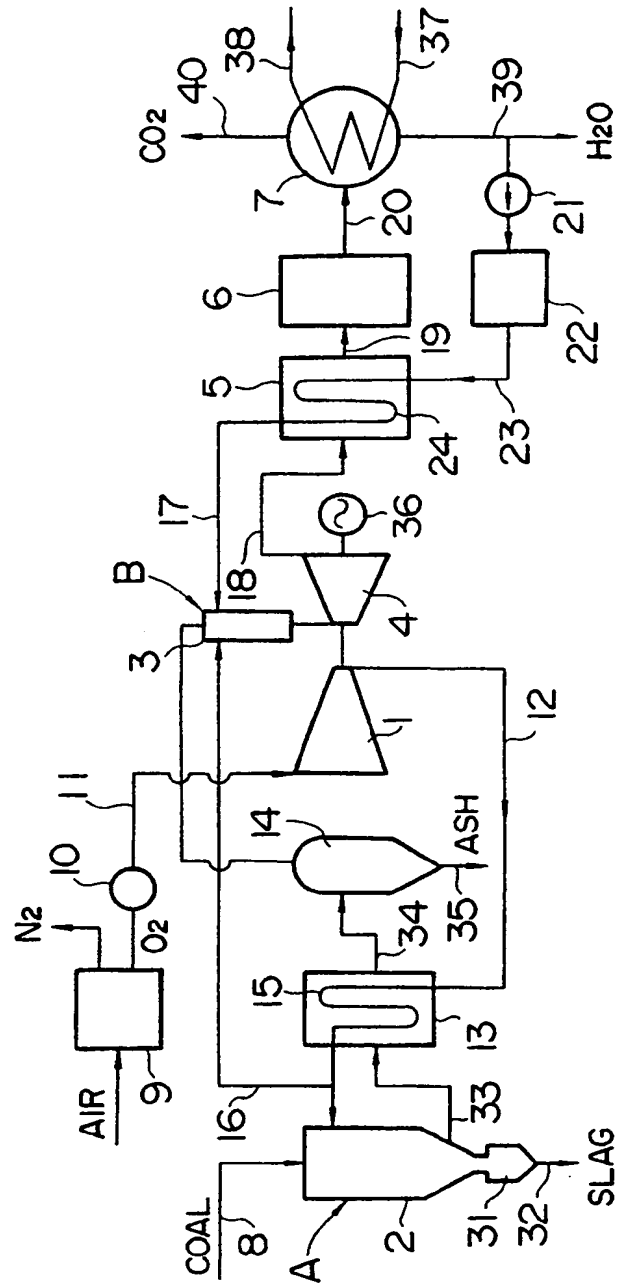


FIG. 2


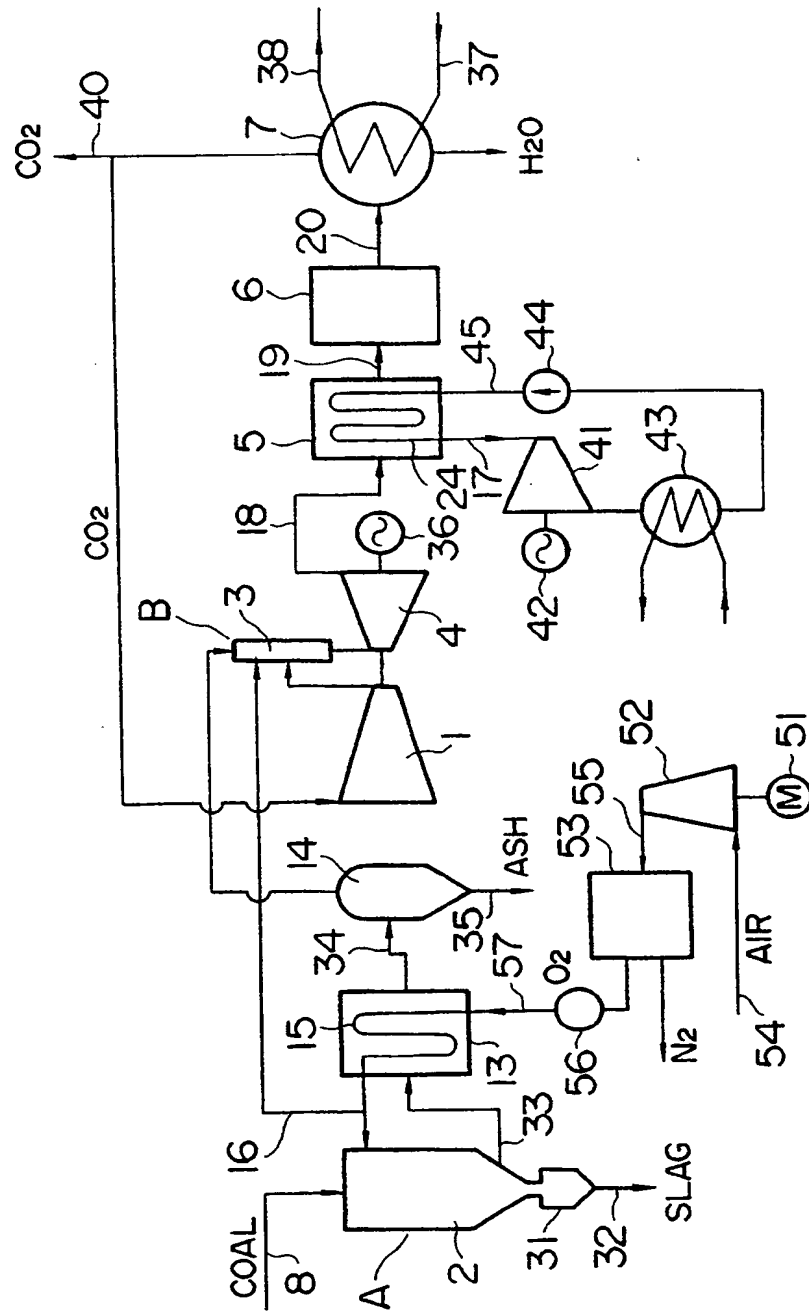


FIG. 3

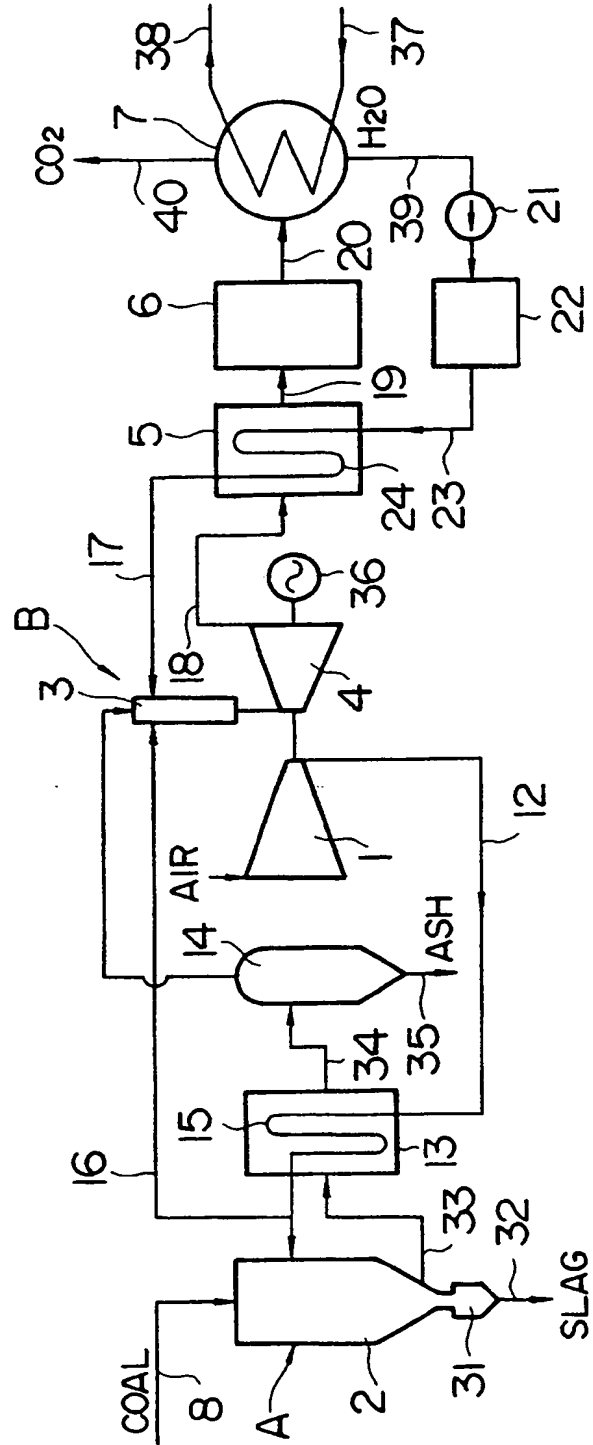

461E

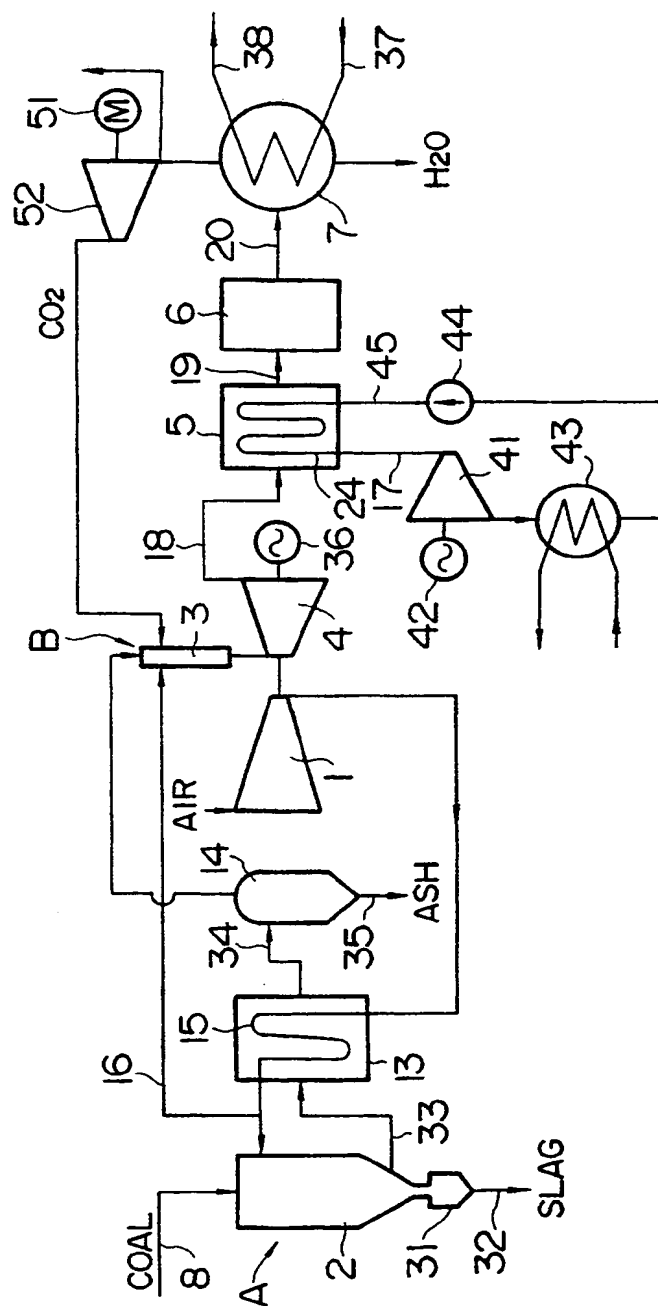


FIG. 5

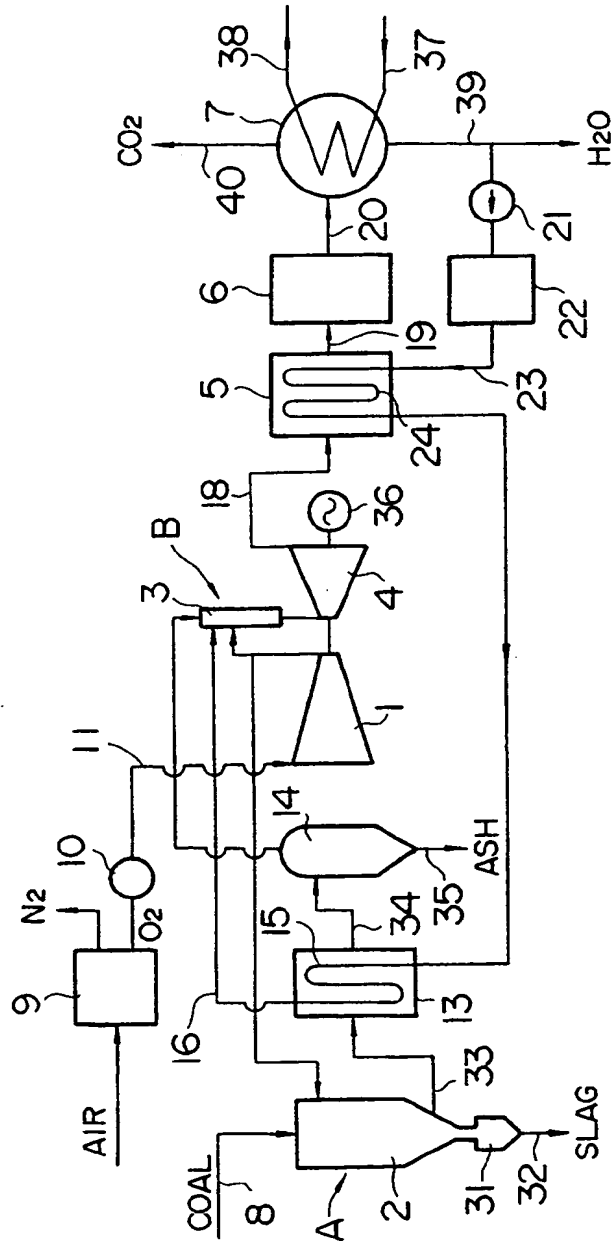


FIG. 6


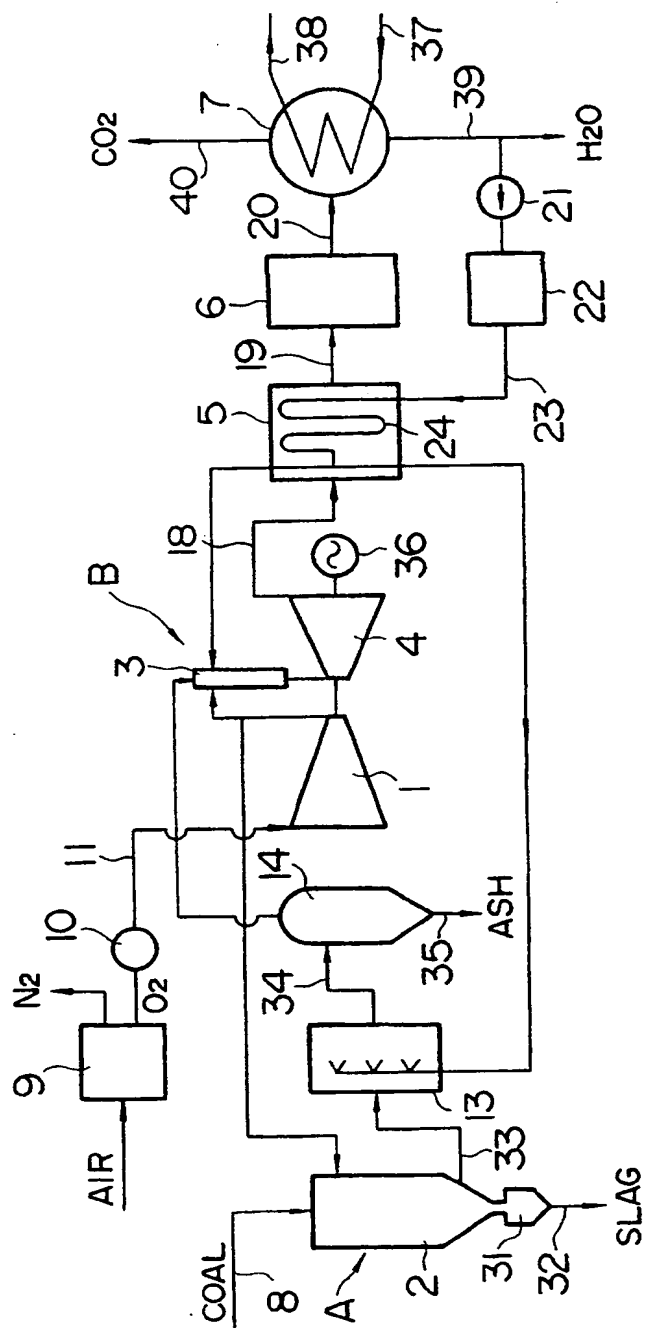


FIG. 7



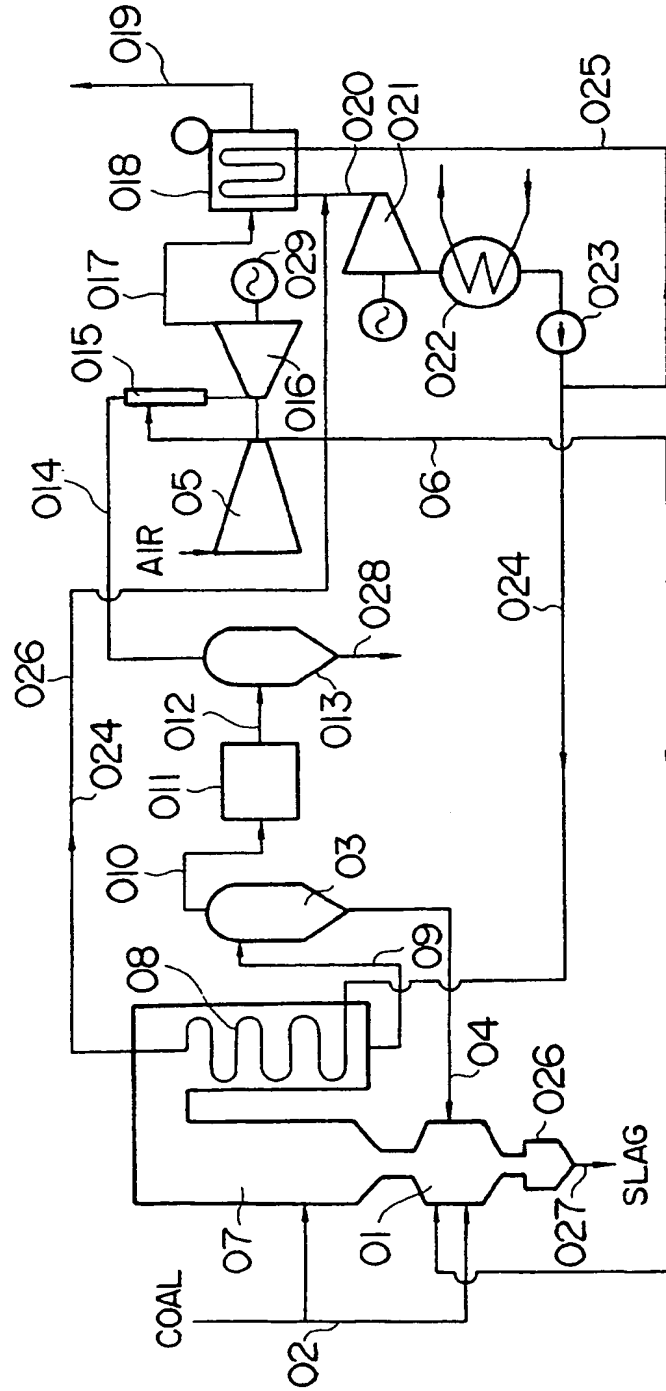

European  
Patent Office

## EUROPEAN SEARCH REPORT

Application Number

EP 91 25 0096

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
A	GB-A-1 104 075 (PRIKLADNOI MEKHANIKI SIBIRSKOGO OTDELENIJA AKADEMII NAUK) * the whole document *	1,2,4	F 01 K 23/06 F 02 C 3/28
A	EP-A-0 184 137 (GENERAL ELECTRIC) * page 12, line 15 - page 16, line 30; figures *	1,2	
A	GB-A-1 298 434 (KELMAR) * the whole document *	1-4	
A	US-A-4 489 562 (SNYDER)		
A	GB-A-2 191 215 (HUMPHREYS)		
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int. Cl.5)
			F 01 K F 02 C
Place of search		Date of completion of search	Examiner
The Hague		05 August 91	VAN GHEEL J.U.M.
<b>CATEGORY OF CITED DOCUMENTS</b> X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons &: member of the same patent family, corresponding document			